


Date: 12/18/2023 Author: Jeff Schuessler Project: YALE ST
Contractor: CITY OF RIVER OAKS City: RIVER OAKS


Comments:
DEVICES SPACED ON 30 FT CENTERS
PHASE 1 OF 7


This plan is for illustrative purposes only and is not intended to relieve the contractor from the requirements of the contract documents or their responsibility to traffic

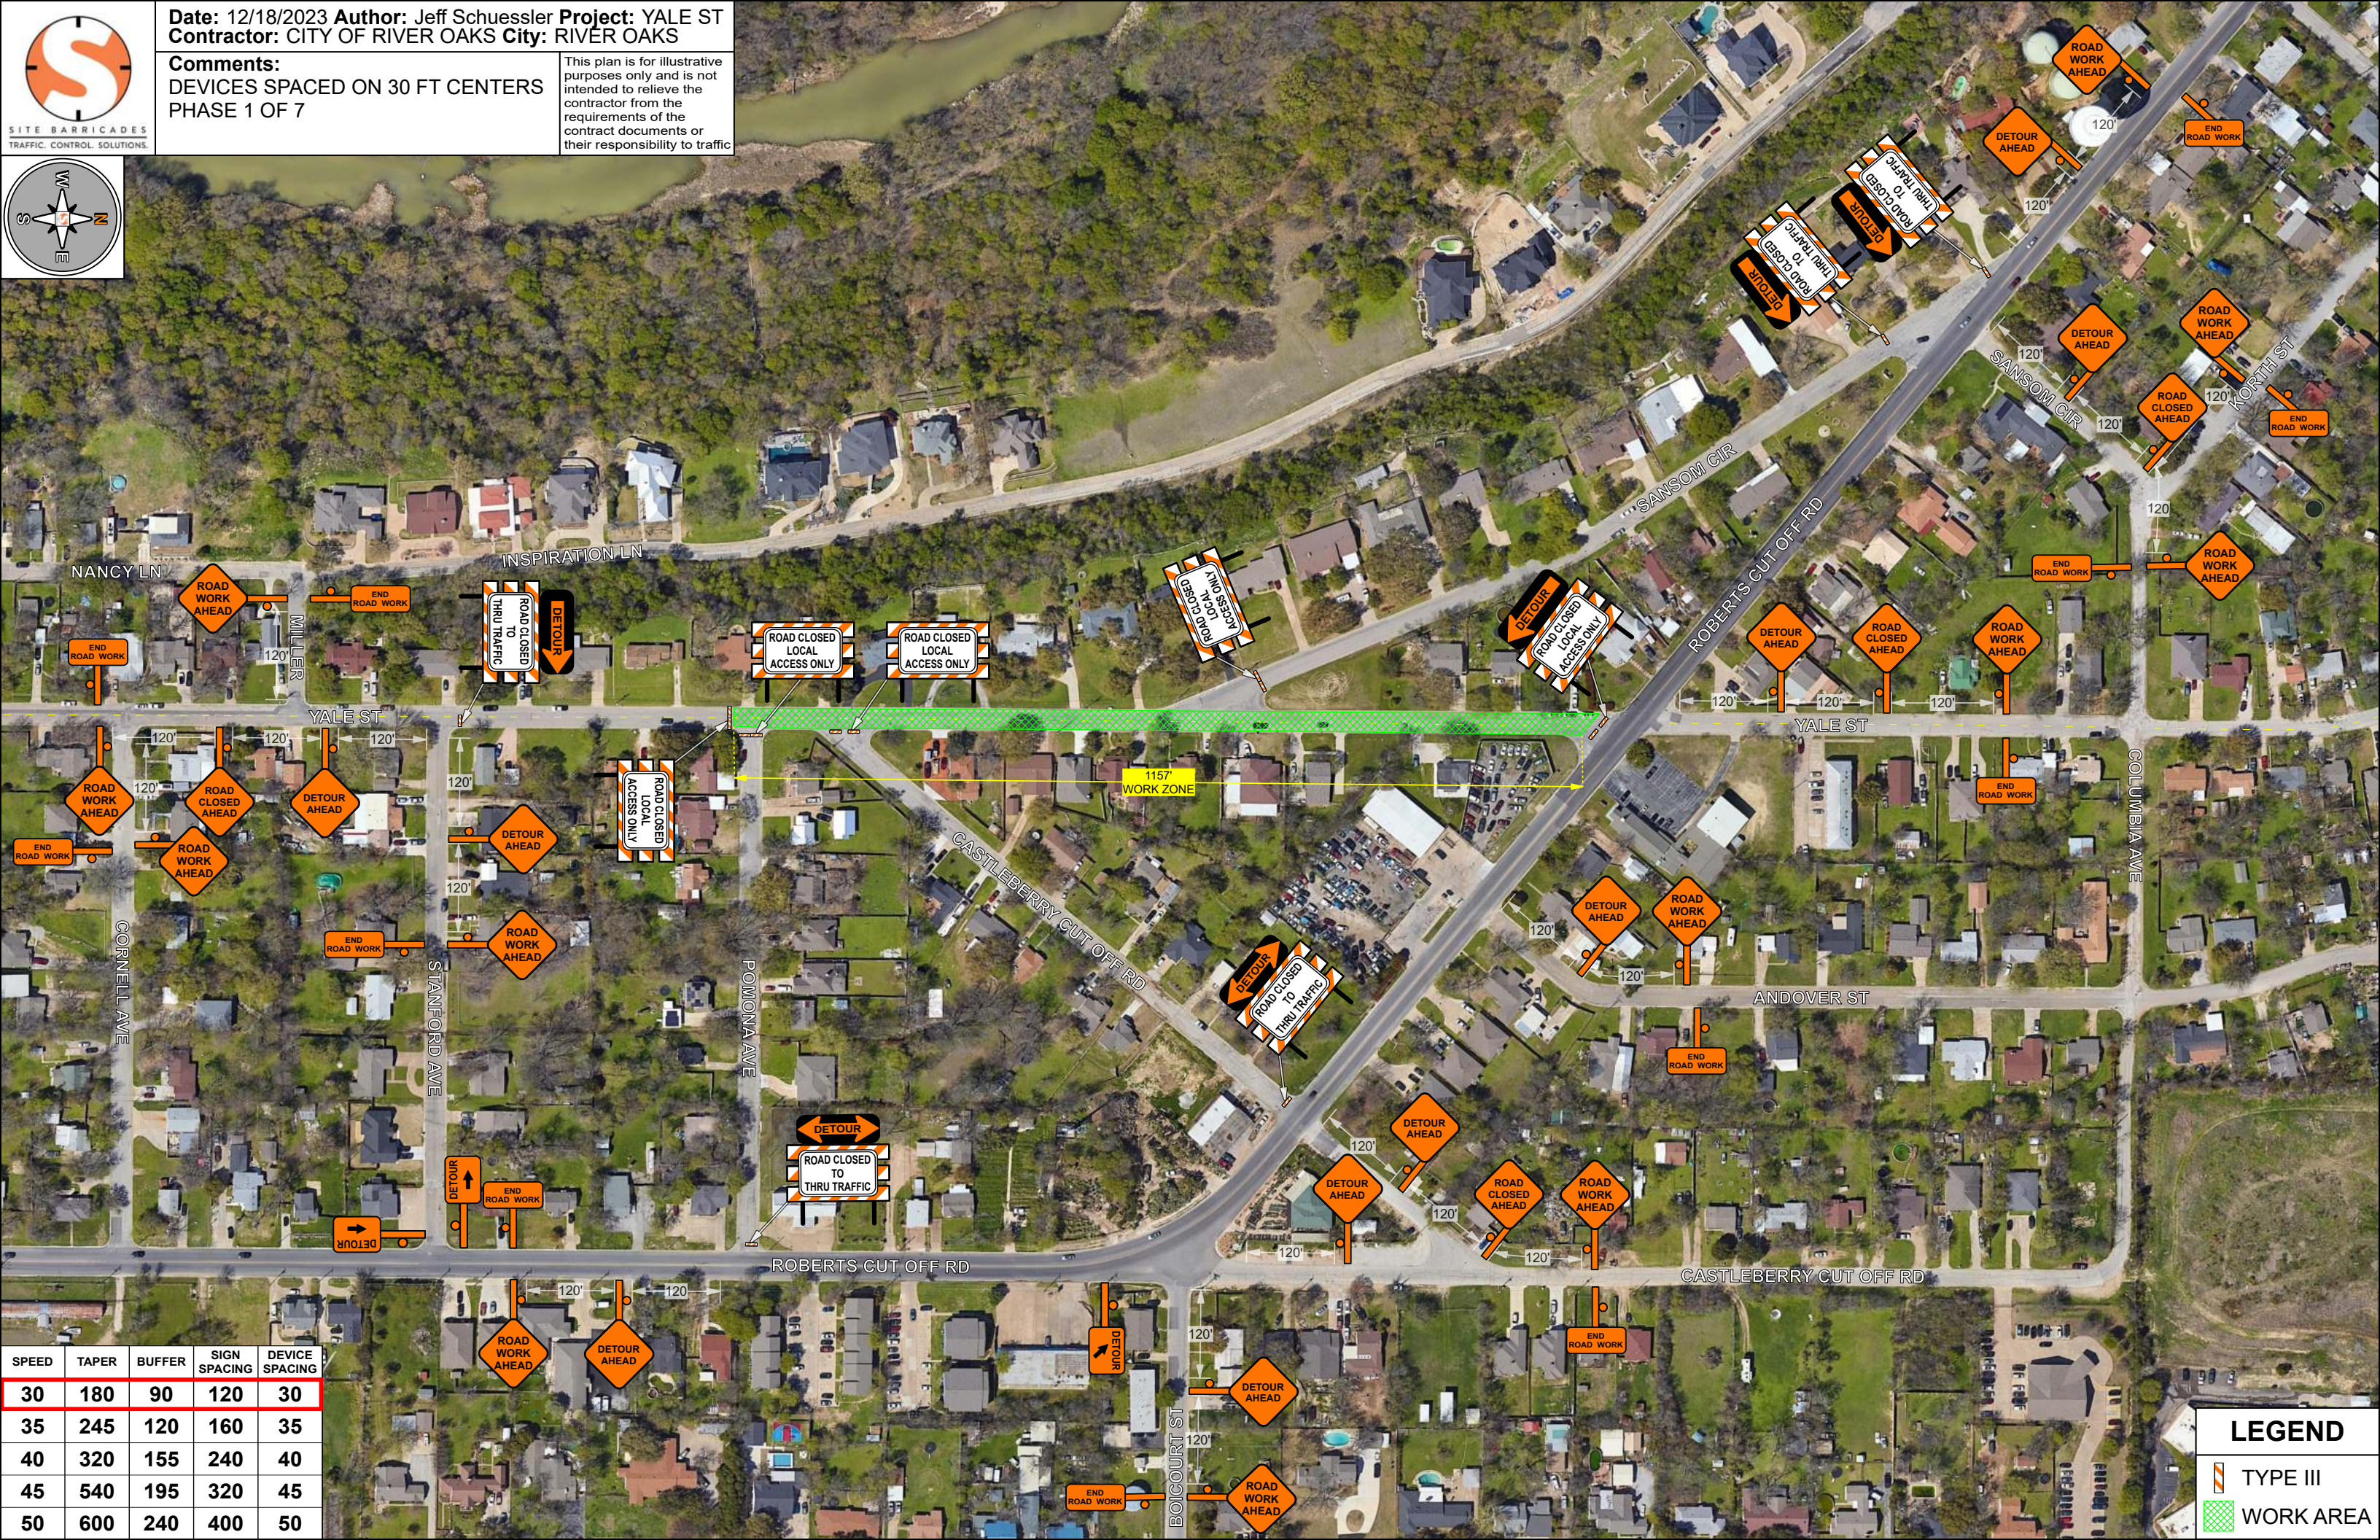

SPEED	TAPER	BUFFER	SIGN SPACING	DEVICE SPACING
30	180	90	120	30
35	245	120	160	35
40	320	155	240	40
45	540	195	320	45
50	600	240	400	50

LEGEND

 TYPE III

 WORK AREA